

Model WF-8935REP
Output: 35 Amps DC
Input: 105-130 VAC,
60 Hz, 600W

Model WF-8945REP
Output: 45 Amps DC
Input: 105-130 VAC,
60 Hz, 770W

Model WF-8955REP
Output: 55 Amps DC
Input: 105-130 VAC,
60 Hz, 940W

Easy Upgrade and Installation

Our WF-8900REP converter replacement kit allows easy upgrade of existing power centers. Technicians can easily remove the lower section of certain power center brands and slide in the WF-8900REP unit. This exchange upgrades the old single stage charger to a high-performance three-stage charging powerhouse.

With 40 years of power equipment experience, WFCO knows what is important to our customers. To make installation easy, WFCO's complete replacement kits for 35 Amp, 45 Amp, and 55 Amp units include the converter, a new DC fuse board, and required fasteners.

Power Factor Correction (PFC) efficient converters available.

Reliability. Vertically integrated, WFCO has total supply chain control, ensuring quality materials, parts, and processes at each stage. Components are quality tested at critical manufacturing stages resulting in zero faults at the final 4-hour burn-in test, helping keep warranty claims below 1%. All models are UL[®] and cUL[®] listed and FCC Class B compliant.


PRODUCT FEATURES

Replacement Chart for REP Units

WFCO	Parallax	Magnetek
WF-8935REP	7335, 6335	6335, 7335
WF-8945REP	7345, 6345	6345, 7345
WF-8955REP	7355, 6355	6355, 7355

The WF-8900REP provides all of WFCO's performance standards:

- Quiet Operation
- Filtered Power
- Overload Protection
- Short Circuit Protection
- FCC Class B Approval

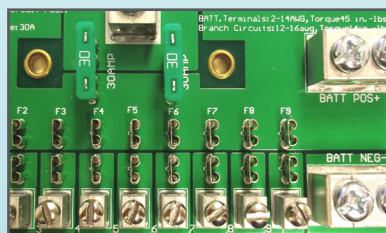


A DC fuse board panel is included for all kits.

WF-8900REP Series

EASY INSTALLATION

All WFCO models are designed with the installer and assembly line in mind. We work with installers every day to find ways to streamline installation to reduce time and fiddle factor.

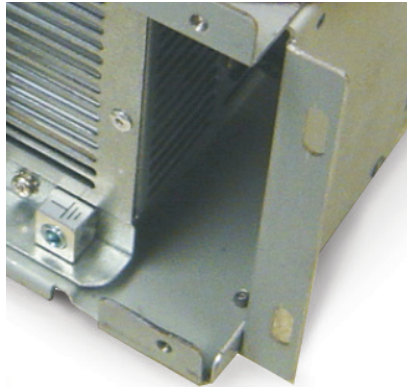

The kit consists of the converter/charger mounted into a metal bracket to make installation easy as an upgrade or replacement for multiple brands of power converters.

All fasteners are included.



SMART ENGINEERING: THREE-STAGE CHARGING IS BETTER. WFCO's automatic three-stage converter handles every charging need for the RV while extending the battery's life. Well-maintained batteries should never need more than two-stage (Normal and Trickle) charging. Our third stage (Bulk) is provided for the rare times a battery needs extra-power for charging. See wfcoelectronics.com for details.



ALL MODELS:
Standard Safety Features/Protections:
Over Current, Over Temperature, Over Voltage, Reverse Polarity
Installation:
Case Material: Metal
Color: Gray

SPECIFICATIONS	WF-8935REP	WF-8945REP	WF-8955REP
Power Input	600W	770W	940W
Input Voltage	105 VAC - 130 VAC / 60 Hz		
Output Current	35A	45A	55A
Converter Type	3 Stage Converter Charger		
Voltage Output	13.2 - 14.4 VDC		
Normal mode	13.6 VDC		
Trickle charge mode	13.2 VDC		
Bulk charge mode	14.4 VDC		
Kit Size:	12 1/8"W x 4 3/4"H x 7 13/16"D		
Outer Dimensions	13 1/4"W x 5 1/4"H x 7 7/8"D		
Fuse Board Dimensions:	2 7/8"W x 5 1/4"H x 7/8"D		
Weight	6.75 lbs.	8 lbs.	9.25 lbs.

Certifications: UL* and cUL* listed and FCC Class B compliant.
Specifications are subject to change without notice or obligation.



THE HEARTBEAT OF TODAY'S RVs
2021 Aeroplex Drive North · Elkhart, IN 46514
P- 877.294.8997 · F- 574.294.8698
wfcoelectronics.com

AD-BSC-0009-0 © 2016 WFCO Electronics Printed in USA 07/16

The RV Industry's Electrical Authority

Our Power Pros provide expert technical support for everything the RV industry needs. Visit wfcoelectronics.com/support.

