




# Pump Silencing Kit

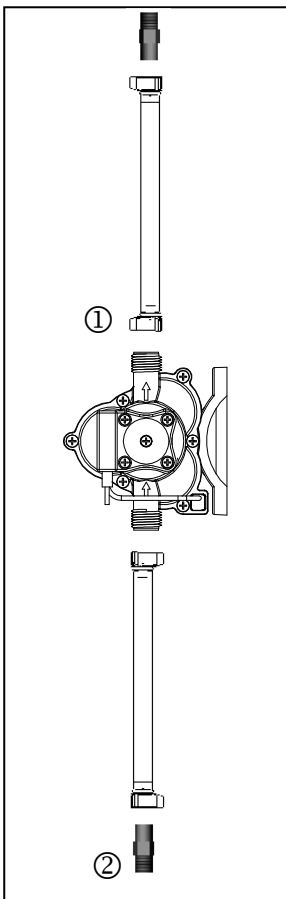

1. Unscrew current plumbing from pump/strainer.
2. Install one hose on either side of pump. Place a loop in the outlet hose if enough room is available without kinking.
3. Use bushing between hose and plumbing, if needed.
4. Hand-tighten all fittings and check for leaks.

## Legend

① 36" hoses

② 1/2" NPT-M bushings

See SHURflo for 1 year limited warranty information.

SHURflo (800) 854-3218

SHURflo East (800) 854-3218

SHURflo Europe, Middle East, Africa +32-14-283500

[www.shurflo.com](http://www.shurflo.com)